


**AURORA ACCESSORIES**  
**WATTS ASME WATER**  
**PRESSURE RELIEF VALVE**  
**A.S.M.E.**

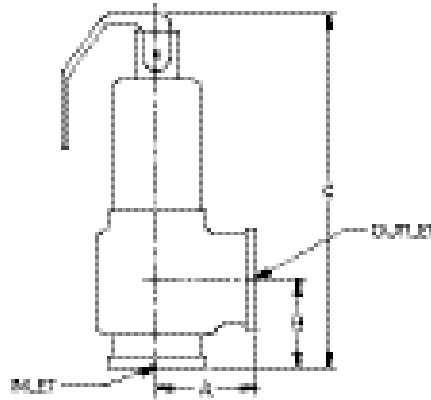

MODEL	INLET	A	B	C	WT
374A	3/4"	1.50 (38)	1.25 (32)	3.63 (72)	1 (.5)
174A	3/4"	1.63 (41)	1.13 (29)	4.88 (124)	2 (.9)
174A	1"	1.88 (48)	1.50 (38)	5.88 (149)	3 (1.4)
174A	1-1/4"	2.38 (60)	2.13 (54)	8.50 (216)	6 (2.7)
174A	1-1/2"	2.63 (67)	2.50 (64)	9.25 (235)	7 (3.2)
174A	2"	3.38 (86)	3.00 (76)	10.25 (260)	14 (6.4)

Setting and Relieving Capacities (National Board Certified Ratings)  
 BTU Steam Discharge Capacities in BTU/Hr.

Model	Size	30 psi	100 psi	125 psi	150 psi
374A	3/4"	550,000	-	-	-
174A	3/4"	650,000	1,695,000	2,070,000	2,445,000
174A	1"	1,005,000	2,635,000	3,215,000	3,795,000
174A	1-1/4"	1,682,000	4,399,000	5,370,000	6,340,000
174A	1-1/2"	2,020,000	2,290,000	6,460,000	7,630,000
174A	2"	3,815,000	9,970,000	12,170,000	12,437,000

RTF on pressure ranges other than noted above.

Bronze body ASME water pressure safety relief valve

**NOTES:**

1. All dimensions in inches (mm), lbs (kg)
2. Dimensions may vary plus minus 1/8 (3)
3. Maximum working pressure is 150 psi (517kPa)
4. Pressure range 30-150 psi in 5 psi increments.
5. For additional information visit [www.wattsreg.com](http://www.wattsreg.com)